



格林达 宣城格林达橡塑密封科技有限公司

XUANCHENG GRAND RUBBER & SEALING TECHNOLOGY CO.,LTD



宣城格林达橡塑密封科技有限公司是一家专业生产橡胶板、防滑垫、橡胶密封条、密封垫片及橡胶模压制品的企业，产品广泛应用于石油、化工、电力、船舶、造纸、机械制造等行业。且能根据客户需要生产各种规格，特殊性能的橡塑制品，本公司技术力量雄厚，生产设备先进检测手段齐全，售后服务完善，深受广大客户好评。

二十一世纪，全球经济进入国际化时代，我们依托完善的管理制度、先进的管理方法、全面的工艺设备级装备及雄厚的技术力量，格林达橡塑密封产品远销全球 40 多个国家和地区，得到用户的广泛好评。

热诚欢迎广大国内外用户及经销商莅临参观指导。

客户是格林达之源，质量是格林达之本

把好产品质量关，做好产品售后服务

Xuancheng Grand Rubber & Sealing Technology Co., Ltd. is an enterprise specializing in the production of Rubber Sheet, Non-Slip Rubber Mat, Rubber Seal Strip, Gasket Sheet and Rubber Molded Products, the products are widely used in petroleum, chemical industry, electric power, shipping, paper making, machinery manufacturing and other industries. And according to customer needs to produce various specifications, special performance of rubber & plastic products, the company has strong technical force, advanced production equipment detection means complete, perfect after-sales service, by the majority of customers.

In the 21st century, the global economy has entered the era of internationalization. Relying on the perfect management system, advanced management methods, comprehensive technological equipment and strong technical force, GRAND Rubber & Sealing products have been sold to more than 40 countries and regions all over the world, and have been widely praised by users.

If you have any questions, please kindly contact me freely! I hope to be your products supplier and make a nice & consistent cooperation in the future!

质量 ● 价格 ● 交货期 ● 服务

Quality ● Price ● Deliveryt ● Service

(More informations please see as our website: <http://>)



格林达 宣城格林达橡塑密封科技有限公司

XUANCHENG GRAND RUBBER & SEALING TECHNOLOGY CO.,LTD

目录 CATALOGUE

工业橡胶板系列

INDUSTRIAL RUBBER SHEET SERIES

防滑橡胶垫系列

ANTI-SLIP RUBBER MAT SERIES

橡胶制品(模压&挤出)系列

RUBBER PRODUCTS(MOLDED & EXTRUSION)SERIES

密封制品系列

SEALING PRODUCTS SERIES



格林达 宣城格林达橡塑密封科技有限公司

XUANCHENG GRAND RUBBER & SEALING TECHNOLOGY CO.,LTD



普通橡胶板 General(NR/SBR) Rubber Sheet

- 特点：防水、防震、密封性
- 用途：密封件、橡胶圈及地面铺设

●Feature:Water-proof,shock -proof and sealing.

●Application:It can be used for sealing parts, rubber rings and flooring.

●Specification:

厚度/Thickness	宽度/Width	长度/Length
1-100mm	10mm--3000mm	1-50m

Properties Quality	硬度 Hardness ShoreA	比重 Density g/cm3	拉伸强度 Tensile strength MPA	伸长率 Elongation %	温度范围 Temperature range (℃)
NR/SBR	70±5	1.8	2.5	180	-25~+80
NR/SBR	70±5	1.6	3.0	200	-25~+100
NR/SBR	65±5	1.5	4.0	250	-25~+120
NR/SBR	60±5	1.4	5.0	300	-25~+120
NR/SBR	60±5	1.3	8.0	400	-25~+120
NR/SBR	50±5	1.2	10.0	600	-25~+120

备注/Note:

- ①该类型产品可提供各种颜色/All the colors available.
- ②该类型产品根据性能需要可以夹纱布、尼龙布等/Cloth insertion、nylon insertion available.
- ③该类型产品表面可以制成布纹效果/Cloth impression finish available.
- ④该产品性能和尺寸可根据客户需求定制/Specification and dimention on the customer's request.



格林达 宣城格林达橡塑密封科技有限公司

XUANCHENG GRAND RUBBER & SEALING TECHNOLOGY CO.,LTD



氯丁橡胶板 NEOPRENE(CR) RUBBER SHEET

●特点: 阻燃性、耐油性

●用途: 垫圈、车间、防火场所

●Feature: Flame retardance and oil-resistance

●Application: It can be used for punching washers, workplace, fireproof place.

●Specification:

厚度/Thickness	宽度/Width	长度/Length
1-100mm	10mm--3000mm	1-50m

Properties Quality	硬度 Hardness ShoreA	比重 Density g/cm3	拉伸强度 Tensile strength MPA	伸长率 Elongation %	温度范围 Temperature range (℃)
CR RUBBER SHEET	70 ± 5	1.6	3.0	200	-25~+120
CR RUBBER SHEET	60 ± 5	1.5	4.0	250	-25~+120
CR RUBBER SHEET	60 ± 5	1.4	5.0	300	-25~+120
CR RUBBER SHEET	50 ± 5	1.35	6.0	350	-25~+120
CR RUBBER SHEET	40 ± 5	1.3	8.0	400	-25~+120
FLAME RETARDANT CR	65 ± 5	1.4	5.0	250	-25~+120
FLAME RETARDANT CR	70 ± 5	1.5	4.0	200	-25~+120

备注/Note:

①该类型产品可提供各种颜色/All the colors available.

②该类型产品根据性能需要可以夹纱布、尼龙布等/Cloth insertion、nylon insertion available.

③该类型产品表面可以制成布纹效果/Cloth impression finish available.

④该产品性能和尺寸可根据客户需求定制/Specification and dimension on the customer's request.



格林达 宣城格林达橡塑密封科技有限公司

XUANCHENG GRAND RUBBER & SEALING TECHNOLOGY CO.,LTD



丁苯橡胶板 SBR RUBBER SHEET

- 特点：耐磨、抗震、防水
- 用途：适合制作各种垫片

●Feature: Resistance of abrasion, shock resistance and good sealability

●Application: It's used for gasket and flooring.

●Specification:

厚度/Thickness	宽度/Width	长度/Length
1-100mm	10mm--3000mm	1-50m

Properties Quality	硬度	比重	拉伸强度	伸长率	温度范围
	Hardness ShoreA	Density g/cm3	Tensile strength MPA	Elongation %	Temperature range (℃)
SBR RUBBER SHEET	70±5	1.6	3.0	200	-25~+100

备注/Note:

- ①该类型产品可提供各种颜色/All the colors available.
- ②该类型产品根据性能需要可以夹纱布、尼龙布等/Cloth insertion、nylon insertion available.
- ③该类型产品表面可以制成布纹效果/Cloth impression finish available.
- ④该产品性能和尺寸可根据客户需求定制/Specification and dimension on the customer's request.



格林达宣城格林达橡塑密封科技有限公司

XUANCHENG GRAND RUBBER & SEALING TECHNOLOGY CO.,LTD



丁腈橡胶板

NITRILE (NBR) RUBBER SHEET

- 特点: 耐油性、耐热性
- 用途: 垫圈、油封、容器衬里

- Feature: Oil-resistance and heat resistance.
- Application: It can be used for punching washers, oil seals and container linings.
- Specification:

厚度/Thickness	宽度/Width	长度/Length
1-100mm	10mm--3000mm	1-50m

Properties Quality	硬度 Hardness ShoreA	比重 Density g/cm ³	拉伸强度 Tensile strength MPA	伸长率 Elongation %	温度范围 Temperature range (℃)
NBR RUBBER SHEET	70 ± 5	1.6	3.0	200	-25~+120
NBR RUBBER SHEET	60 ± 5	1.5	4.0	250	-25~+120
NBR RUBBER SHEET	60 ± 5	1.4	5.0	300	-25~+120
NBR RUBBER SHEET	50 ± 5	1.35	6.0	350	-25~+120
NBR RUBBER SHEET	40 ± 5	1.3	8.0	400	-25~+120
HIGH GRADE NBR	60 ± 5	1.3	≥10	400	-30~+120
HIGH GRADE NBR	70 ± 5	1.35	≥8	350	-30~+120

备注/Note:

- ①该类型产品可提供各种颜色/All the colors available.
- ②该类型产品根据性能需要可以夹纱布、尼龙布等/Cloth insertion、nylon insertion available.
- ③该类型产品表面可以制成布纹效果/Cloth impression finish available.
- ④该产品性能和尺寸可根据客户需求定制/Specification and dimension on the customer's request.



格林达 宣城格林达橡塑密封科技有限公司

XUANCHENG GRAND RUBBER & SEALING TECHNOLOGY CO.,LTD



丁基橡胶板 BUTYL RUBBER SHEET

●特点: 气密性好、耐臭氧、耐热、耐老化、耐化学药品、吸震、电绝缘

●用途: 防腐衬里

● Feature :Permeability to air ,ozone and heat resistance, anti-aging and chemical,shock absorption,electric insulation

●Application: It can be used for corrosion resistant linings.

●Specification:

厚度/Thickness	宽度/Width	长度/Length
1-100mm	10mm--3000mm	1-50m

Properties Quality	硬度 Hardness ShoreA	比重 Density g/cm3	拉伸强度 Tensile strength MPA	伸长率 Elongation %	温度范围 Temperature range (℃)
BUTYL RUBBER SHEET	70±5	1.5	5.0	250	-35~+120
BUTYL RUBBER SHEET	60±5	1.4	6.0	300	-35~+120
BUTYL RUBBER SHEET	50±5	1.3	7.0	350	-35~+120

备注/Note:

①该类型产品可提供各种颜色/All the colors available.

②该类型产品根据性能需要可以夹纱布、尼龙布等/Cloth insertion、nylon insertion available.

③该类型产品表面可以制成布纹效果/Cloth impression finish available.

④该产品性能和尺寸可根据客户需求定制/Specification and dimension on the customer's request.



格林达 宣城格林达橡塑密封科技有限公司

XUANCHENG GRAND RUBBER & SEALING TECHNOLOGY CO.,LTD



三元乙丙橡胶板

EPDM RUBBER SHEET

- 特点: 耐老化、耐臭氧、耐热、耐蒸汽
- 用途: 桥梁工程、房屋防漏等特殊场合

●Feature: Anti-aging, ozone resistance, heat and steam resistance.

●Application: It can be used for bridge engineering, roofing and other special situations.

●Specification:

厚度/Thickness	宽度/Width	长度/Length
1-100mm	10mm--3000mm	1-50m

Properties Quality	硬度 Hardness ShoreA	比重 Density g/cm3	拉伸强度 Tensile strength MPA	伸长率 Elongation %	温度范围 Temperature range (℃)
EPDM RUBBER SHEET	65±5	1.4	5.0	300	-30~+120
HIGH GRADE EPDM	70±5	1.3	≥10	400	-30~+130


备注/Note:

- ①该类型产品可提供各种颜色/All the colors available.
- ②该类型产品根据性能需要可以夹纱布、尼龙布等/Cloth insertion、nylon insertion available.
- ③该类型产品表面可以制成布纹效果/Cloth impression finish available.
- ④该产品性能和尺寸可根据客户需求定制/Specification and dimension on the customer's request.



格林达 宣城格林达橡塑密封科技有限公司

XUANCHENG GRAND RUBBER & SEALING TECHNOLOGY CO.,LTD

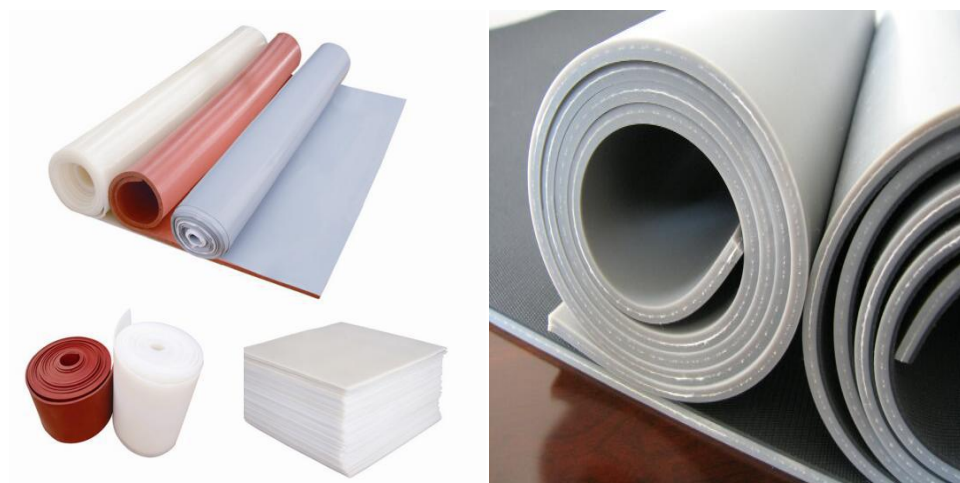

硅橡胶版 SILICON RUBBER SHEET

●特点: 无毒无气味、耐高温、耐老化

●用途: 用于医药、化工、电子、食品等行业

●Feature: Nonpoisonous and tasteless ,high-temperature resistance and anti-aging .

● Application: It can be used for pharmaceutical ,chemical,electrical and food processing industries.

●Specification:

厚度/Thickness	宽度/Width	长度/Length
1-100mm	10mm--3000mm	1-50m

Properties Quality	硬度 Hardness ShoreA	比重 Density g/cm3	拉伸强度 Tensile strength MPA	伸长率 Elongation %	温度范围 Temperature range (℃)
SILICON RUBBER SHEET	60±5	1.25	7.0	350	-60~+200
SILICON RUBBER SHEET	50±5	1.25	7.0	350	-60~+200
SILICON RUBBER SHEET	40±5	1.25	7.0	400	-60~+200

备注/Note:

①该类型产品可提供各种颜色/All the colors available.

②该类型产品根据性能需要可以夹纱布、尼龙布等/Cloth insertion、nylon insertion available.

③该类型产品表面可以制成布纹效果/Cloth impression finish available.

④该产品性能和尺寸可根据客户需求定制/Specification and dimention on the customer's request.



格林达 宣城格林达橡塑密封科技有限公司

XUANCHENG GRAND RUBBER & SEALING TECHNOLOGY CO.,LTD



高抗撕硅橡胶版 HIGH TEARING RESISTANCE SILICONE RUBBER SHEET

- 特点: 高抗撕拉性、高延伸性、耐高温、耐老化、抗腐蚀
- 用途: 用于医药、化工及食品行业

- Feature : High tearing resistance,high extensibility,high-temperature resistance and anti-aging .
- Application : It can be used for pharmaceutical ,chemical and food processing industries.
- Specification:

厚度/Thickness	宽度/Width	长度/Length
1-100mm	10mm--3000mm	1-50m

Properties Quality	硬度 Hardness ShoreA	比重 Density g/cm3	拉伸强度 Tensile strength MPA	伸长率 Elongation %	温度范围 Temperature range (℃)
High tearing resistance silicone rubber sheet	60±5	1.30	10.0	400	-60~+250

备注/Note:

- ①该类型产品可提供各种颜色/All the colors available.
- ②该类型产品根据性能需要可以夹纱布、尼龙布等/Cloth insertion、nylon insertion available.
- ③该类型产品表面可以制成布纹效果/Cloth impression finish available.
- ④该产品性能和尺寸可根据客户需求定制/Specification and dimention on the customer's request.



格林达 宣城格林达橡塑密封科技有限公司

XUANCHENG GRAND RUBBER & SEALING TECHNOLOGY CO.,LTD



氟橡胶板 VITON RUBBER SHEET

- 特点: 最佳的耐油、耐高温、耐化学品腐蚀性能和抗老化性能
- 用途: 冲制各种高耐油、耐高温腐蚀性强的密封件、密封圈、缸模衬里及航天、航空领域使用

- Feature : The best oil resisting, high-temperature resistance, anti-chemical corrosion and anti-aging resistance

- Application : Applied to punch all kinds of oil resisting, high temperature bearing products with high requirements, or pavement in the above occasions, also used in the tank lining in the corrosive chemical products.

●Specification:

厚度/Thickness	宽度/Width	长度/Length
1-100mm	10mm--3000mm	1-50m

Properties Quality	硬度 Hardness ShoreA	比重 Density g/cm3	拉伸强度 Tensile strength MPA	伸长率 Elongation %	温度范围 Temperature range (℃)
VITON RUBBER SHEET	70±5	2.0	8.0	300	-30~+280
VITON RUBBER SHEET	70±5	2.0	10.0	350	-30~+280

备注/Note:

- ①该类型产品可提供各种颜色/All the colors available.
- ②该类型产品根据性能需要可以夹纱布、尼龙布等/Cloth insertion、nylon insertion available.
- ③该类型产品表面可以制成布纹效果/Cloth impression finish available.
- ④该产品性能和尺寸可根据客户需求定制/Specification and dimension on the customer's request.



格林达 宣城格林达橡塑密封科技有限公司

XUANCHENG GRAND RUBBER & SEALING TECHNOLOGY CO.,LTD



天然橡胶板 NATURAL (NR) RUBBER SHEET

- 特点: 高弹性、高气密性、高强度
- 用途: 密封垫、橡胶圈、地面铺设

- Feature : Strong elasticity, high air impermeability and high strength
- Application : It can be used for sealing gaskets, rubber rings and flooring materials.
- Specification:

厚度/Thickness	宽度/Width	长度/Length
1-100mm	10mm--3000mm	1-50m

Properties Quality	硬度 Hardness ShoreA	比重 Density g/cm ³	拉伸强度 Tensile strength MPA	伸长率 Elongation %	温度范围 Temperature range (℃)	磨耗 Abration (mm ³)
NATURAL RUBBER SHEET	40±5	1.1	22	600	-25~+100	80
NATURAL RUBBER SHEET	45±5	1.2	15	600	-25~+100	120
NATURAL RUBBER SHEET	50±5	1.2	12	500	-25~+100	120
NATURAL RUBBER SHEET	55±5	1.25	10	500	-25~+100	120
NATURAL RUBBER SHEET	60±5	1.30	14	500	-25~+100	120

备注/Note:

- ①该类型产品可提供各种颜色/All the colors available.
- ②该类型产品根据性能需要可以夹纱布、尼龙布等/Cloth insertion、nylon insertion available.
- ③该类型产品表面可以制成布纹效果/Cloth impression finish available.
- ④该产品性能和尺寸可根据客户需求定制/Specification and dimension on the customer's request.



格林达 宣城格林达橡塑密封科技有限公司

XUANCHENG GRAND RUBBER & SEALING TECHNOLOGY CO.,LTD



耐油橡胶板 OIL-PROOF RUBBER SHEET

- 特点：耐油、耐腐蚀性、密封性、抗膨胀性
- 用途：冲制各种耐油类密封件，与油脂类接触的工作台面铺设
- Feature : Oil-resistance,anti-corrosion,good sealing and anti-expansion
- Application : It can be used to punch all kinds of sealing parts ,oil touching work table and ground.
- Specification:

厚度/Thickness	宽度/Width	长度/Length
1-100mm	10mm--3000mm	1-50m

Properties Quality	硬度 Hardness ShoreA	比重 Density g/cm3	拉伸强度 Tensile strength MPA	伸长率 Elongation %	温度范围 Temperature range (℃)
Oil-proof rubber sheet	65±5	1.5	3.5	280	-20~+100
Oil-proof rubber sheet	60±5	1.4	5.0	300	-20~+100

备注/Note:

- ①该类型产品可提供各种颜色/All the colors available.
- ②该类型产品根据性能需要可以夹纱布、尼龙布等/Cloth insertion、nylon insertion available.
- ③该类型产品表面可以制成布纹效果/Cloth impression finish available.
- ④该产品性能和尺寸可根据客户需求定制/Specification and dimension on the customer's request.



格林达 宣城格林达橡塑密封科技有限公司

XUANCHENG GRAND RUBBER & SEALING TECHNOLOGY CO.,LTD



耐酸碱橡胶板

ACID & ALKALI BEARING RUBBER SHEET

- 特点：耐酸碱介质、抗腐蚀
- 用途：冲制各种用于有酸、碱介质的密封件

- Feature : Acid & alkali medium resistance and anti-corrosion
- Application : It can be used to punch all kinds of sealing for acid & alkali medium
- Specification:

厚度/Thickness	宽度/Width	长度/Length
1-100mm	10mm--3000mm	1-50m

Properties Quality	硬度 Hardness ShoreA	比重 Density g/cm3	拉伸强度 Tensile strength MPA	伸长率 Elongation %	温度范围 Temperature range (℃)
Acid & alkali bearing rubber sheet	65±5	1.5	3.5	280	-20~+100
Acid & alkali bearing rubber sheet	60±5	1.4	5.0	300	-20~+100

备注/Note:

- ①该类型产品可提供各种颜色/All the colors available.
- ②该类型产品根据性能需要可以夹纱布、尼龙布等/Cloth insertion、nylon insertion available.
- ③该类型产品表面可以制成布纹效果/Cloth impression finish available.
- ④该产品性能和尺寸可根据客户需求定制/Specification and dimension on the customer's request.



格林达 宣城格林达橡塑密封科技有限公司

XUANCHENG GRAND RUBBER & SEALING TECHNOLOGY CO.,LTD



耐寒热橡胶板 HOT & COLD BEARING RUBBER SHEET

●特点: 良好的耐寒热性, 高低温环境中工作不易老化

●用途: 用于冷藏车、库、汽管道密封件

● Feature : Good hot & cold bearing performance, good anti-aging feature under hot and cold surroundings

● Application : It can be used for sealing parts of refrigerator car, refrigerator storage and gas pipeline.

● Specification:

厚度/Thickness	宽度/Width	长度/Length
1-100mm	10mm--3000mm	1-50m

Properties Quality	硬度 Hardness ShoreA	比重 Density g/cm ³	拉伸强度 Tensile strength MPA	伸长率 Elongation %	温度范围 Temperature range (°C)
Hot & cold bearing rubber sheet	65±5	1.5	3.5	280	-60~+150

备注/Note:

①该类型产品可提供各种颜色/All the colors available.

②该类型产品根据性能需要可以夹纱布、尼龙布等/Cloth insertion、nylon insertion available.

③该类型产品表面可以制成布纹效果/Cloth impression finish available.

④该产品性能和尺寸可根据客户需求定制/Specification and dimension on the customer's request.



格林达 宣城格林达橡塑密封科技有限公司

XUANCHENG GRAND RUBBER & SEALING TECHNOLOGY CO.,LTD



彩色橡胶板 COLORIZED RUBBER SHEET

●特点: 防水、抗震、密封性

●用途: 用于铺设、胶垫、密封件等

●Feature : Water-proof, shock resistance and good sealability

●Application : It can be used for flooring, rubber mats and gasket seal.

●Specification:

厚度/Thickness	宽度/Width	长度/Length
1-100mm	10mm--3000mm	1-50m

Quality	Properties	硬度	比重	拉伸强度	伸长率	温度范围
		Hardness ShoreA	Density g/cm ³	Tensile strength MPA	Elongation %	Temperature range (°C)
	Colorized rubber sheet	70±5	1.6	3.0	200	-20~+100

备注/Note:

①该类型产品表面可以制成布纹效果, 便于粘贴/Cloth impression finish available in order to stick easily.


②该类型产品根据性能需要可以夹纱布、尼龙布等/Cloth insertion、nylon insertion available.

③该产品性能和尺寸可根据客户需求定制/Specification and dimension on the customer's request.



格林达 宣城格林达橡塑密封科技有限公司

XUANCHENG GRAND RUBBER & SEALING TECHNOLOGY CO.,LTD

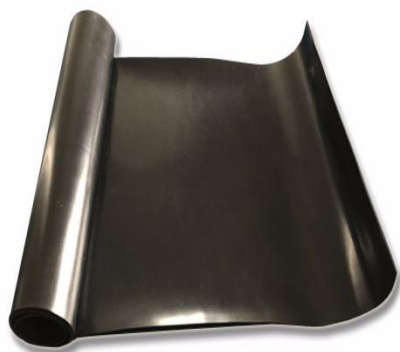

阻燃橡胶板

INFLAMING RETARDING RUBBER SHEET

- 特点: 抗燃烧、离火自熄
- 用途: 各种防火患场所及冰箱、空调主机使用


- Feature : Fire resistance,immediately self-extinguish after away from the fire
- Application : It can be used for fireproof sites,refrigerator and air conditioner.
- Specification:

厚度/Thickness	宽度/Width	长度/Length
1-100mm	10mm--3000mm	1-50m

Quality	Properties	硬度 Hardness Shore A	比重 Density g/cm3	拉伸强度 Tensile strength MPA	伸长率 Elongation %	氧指数 Oxygen index
	Inflaming retarding rubber sheet	70±5	1.6	3.5	250	30

备注/Note:

- ①该类型产品可提供各种颜色/All the colors available.
- ②该类型产品根据性能需要可以夹纱布、尼龙布等/Cloth insertion、nylon insertion available.
- ③该类型产品表面可以制成布纹效果/Cloth impression finish available.
- ④该产品性能和尺寸可根据客户需求定制/Specification and dimension on the customer's request.

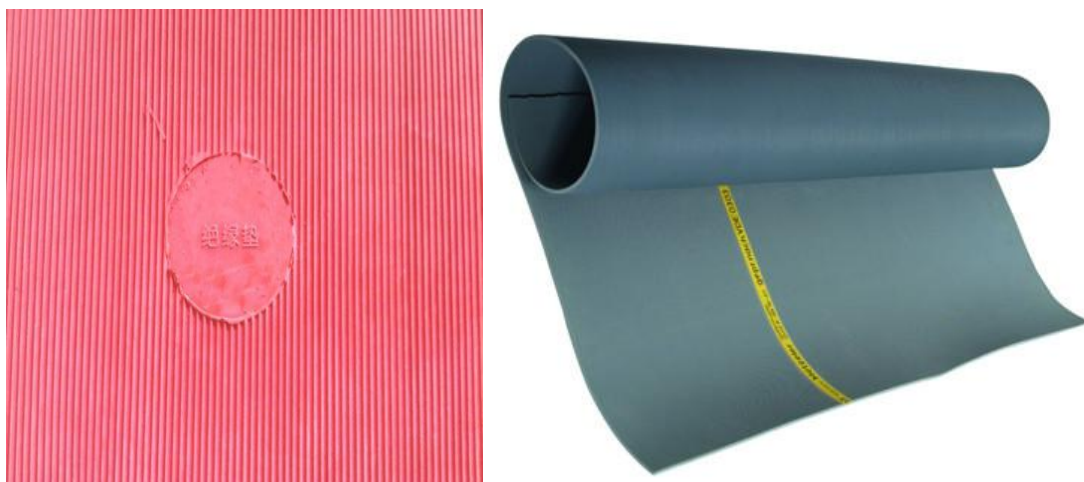

绝缘橡胶板 INSULATION RUBBER SHEET

- 特点: 在介电环境中工作, 最大绝缘电压 10 万伏
- 用途: 用于变电所、发电厂、配电房等

● Feature : Work in the conductive surroundings,the maximum insulation voltage can reach 100000V.

● Application : It can be used for transformer station,power plant and electricity distributing station.

●Specification:

厚度/Thickness	宽度/Width	长度/Length
3-80mm	500mm--1500mm	1-50m

Properties Quality	硬 度 Hardn ess Shore A	比重 Density g/cm3	拉伸强度 Tensile strength MPA	伸长率 Elongation %	耐压 Withstand Voltage
	65±5	1.6	4.0	280	3KV-100KV

备注/Note:

①该类型产品可提供各种颜色/All the colors available.

②该产品性能和尺寸可根据客户需求定制/Specification and dimention on the customer's request.



格林达 宣城格林达橡塑密封科技有限公司

XUANCHENG GRAND RUBBER & SEALING TECHNOLOGY CO.,LTD



抗静电橡胶板 **ANTI-STATIC (ESD) RUBBER SHEET**

- 特点: 弹性好、电极性好、排除静电干扰
- 用途: 广泛用于电子、纺织、印染行业及要求较高的场所铺设
- Feature : Strong elasticity,good electric polarity,elimination of static interference
- Application : Widely applied as the pavement in the electronics,textiles and printing & dyeing industry with high requirements.
- Specification:

厚度/Thickness	宽度/Width	长度/Length
2-20mm	500mm--2000mm	1-50m

Properties Quality	硬度 Hardness ShoreA	比重 Density g/cm3	拉伸强度 Tensile strength MPA	伸长率 Elongation %	体积电阻率 Volume Resistance
Green Side	70±5	1.5	6.0	300	10 ⁸ -10 ⁹ Ω cm
Black Side	65±5	1.6	3.0	250	10 ³ -10 ⁵ Ω cm

备注/Note:

- 该产品可做黑色、绿色、一面黑色一面绿色/Black,green,one face is black and the other is green.
- ①该类型产品可提供各种颜色/All the colors available.
- ②该产品性能和尺寸可根据客户需求定制/Specification and dimension on the customer's request.



格林达宣城格林达橡塑密封科技有限公司

XUANCHENG GRAND RUBBER & SEALING TECHNOLOGY CO.,LTD



食品橡胶板

FOOD GRADE RUBBER SHEET

- 特点: 无毒、无味、弹性好
- 用途: 用于食品加工场所及食品行业工具配套件

- Feature :Poison and odor free,good elasticity.
- Application : Can be made as tool fittings used in the food-processing sites and food industry.
- Specification:

厚度/Thickness	宽度/Width	长度/Length
1-100mm	10mm--3000mm	1-50m

Properties	硬度 Hardness ShoreA	比重 Density g/cm3	拉伸强度 Tensile strength MPA	伸长率 Elongation %	颜色 Colour
Quality					
Food grade rubber sheet	60±5	1.5	5.0	300	Red & white

备注/Note:

- 采用无味、无毒原材料制作，无有害化学成分，色泽一致无污染。
- This kind of rubber sheet is made of poison & odor free raw material,no harmful ingredients to human beings,even luster and no pollution.



格林达 宣城格林达橡塑密封科技有限公司

XUANCHENG GRAND RUBBER & SEALING TECHNOLOGY CO.,LTD



海帕隆橡胶板 HYPALON RUBBER SHEET

●特点: 耐臭氧性、耐老化性、耐化学腐蚀性

●用途: 医疗、化工、防腐材料

●Feature : Ozone resistance, anti-aging, chemical resistance

●Application : It can be used for medical and chemical industry, anti-corrosive material.

●Specification:

厚度/Thickness	宽度/Width	长度/Length
1-100mm	10mm--3000mm	1-50m

Properties Quality	硬度 Hardness ShoreA	比重 Density g/cm ³	拉伸强度 Tensile strength MPA	伸长率 Elongation %	温度范围 Temperature range (℃)
Hypalon rubber sheet	60±5	1.4	6.0	300	-30~+120
Hypalon rubber sheet	50±5	1.3	7.0	350	-30~+120



备注/Note:

①该类型产品可提供各种颜色/All the colors available.

②该类型产品根据性能需要可以夹纱布、尼龙布等/Cloth insertion、nylon insertion available.

③该类型产品表面可以制成布纹效果/Cloth impression finish available.

④该产品性能和尺寸可根据客户需求定制/Specification and dimension on the customer's request.

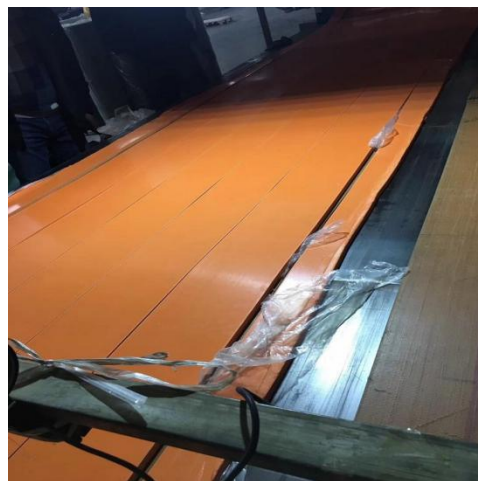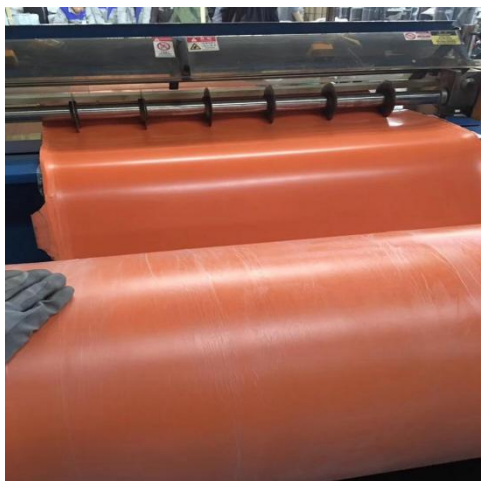



橡胶条 RUBBER STRIIP(SKIRTBOARD)

●特点: 机器裁剪、无缝、多功能

●用途: 衬条、修补条、挡边条



●Feature :Cut by machine,seamless and multifunctional

●Application : It can be used for furring strip,repair strip and skirtboard

●Specification:

厚度/Thickness	宽度/Width	长度/Length
1-100mm	10mm--3000mm	1-50m

Properties Quality	硬度 Hardness ShoreA	比重 Density g/cm3	拉伸强度 Tensile strength MPA	伸长率 Elongation %	温度范围 Temperature range (℃)
RUBBER STRIIP(SKIRTBOARD)	80±5	1.6	3.0	200	-30~+120
RUBBER STRIIP(SKIRTBOARD)	70±5	1.5	4.0	250	-30~+120
RUBBER STRIIP(SKIRTBOARD)	60±5	1.4	6.0	300	-30~+120
RUBBER STRIIP(SKIRTBOARD)	50±5	1.3	8.0	350	-30~+120
RUBBER STRIIP(SKIRTBOARD)	40±5	1.2	10.0	400	-30~+120

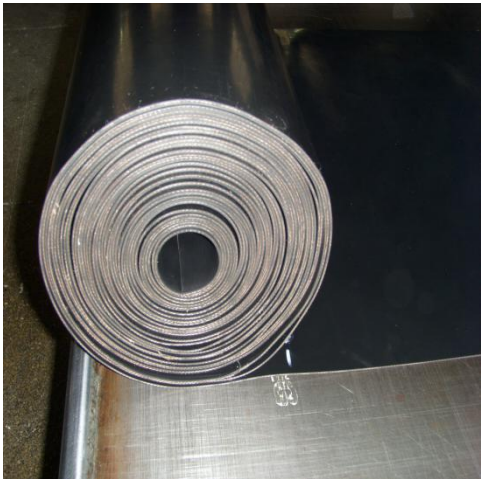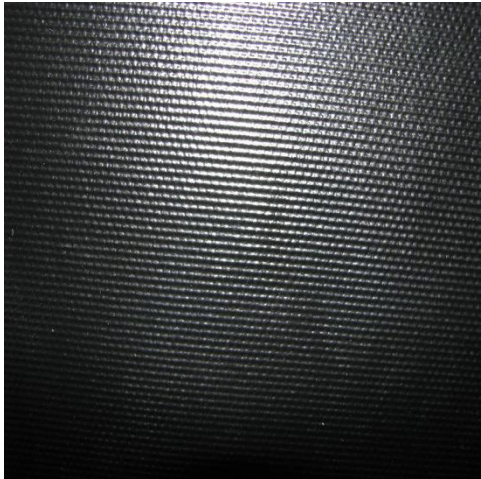NYLON INSERTION 	COTTON INSERTION 
EP CLOTH INSERTION 	METAL MESH INSERTION 
CLOTH FINISH 	BRIGHT CLOTH FINISH 



夹布、金属网（光面或者布纹面）橡胶板

CLOTH INSERTION & METAL MESH

（SMOOTH SURFACE & ROUGH SURFACE）RUBBER SHEET

●特点：有较强的拉伸强力、变形小

●用途：冲制密封件、轻型输送带

●Feature :Strong tense and small distortion

●Application :It can be used for punching sealing parts and light conveying bells.

●Specification:

厚度/Thickness	宽度/Width	长度/Length
1.5-100mm	10mm--3000mm	1-50m

Properties Quality	硬度 Hardness ShoreA	比重 Density g/cm3	拉伸强度 Tensile strength MPA	伸长率 Elongation %	温度范围 Temperature range (℃)
NYLON INSERTION	70±5	1.6	3.50	200	-30~+120
COTTON INSERTION	70±5	1.6	3.50	200	-30~+120
EP INSERTION	65±5	1.4	8.0	300	-30~+120
METAL MESH INSERTION	70±5	1.5	4.50	250	-30~+120
CLOTH FINISH	65±5	1.6	3.0	200	-30~+120
BRIGHT CLOTH FINISH	65±5	1.5	4.0	250	-30~+120

备注/Note:

●所有夹层橡胶板可生产为一面光面一面毛面、布纹面、两面光面、两面布纹面

● All insertion rubber sheets can be smooth surface, rough surface, cloth marks surface, twin-smooth surface, twin-cloth marks surface to satisfy the requirements of the customers.



格林达 宣城格林达橡塑密封科技有限公司

XUANCHENG GRAND RUBBER & SEALING TECHNOLOGY CO.,LTD

① Stud Rubber Mat



② Fine Ribbed Rubber Mat



③ Diamond Rubber Mat



④ Checker Rubber Mat



⑤ Flat Rubber Mat



⑥ Wide Ribbed Rubber Mat






格林达 宣城格林达橡塑密封科技有限公司

XUANCHENG GRAND RUBBER & SEALING TECHNOLOGY CO.,LTD



⑦Orange Rubber Mat

⑧Corrugate Rubber Mat

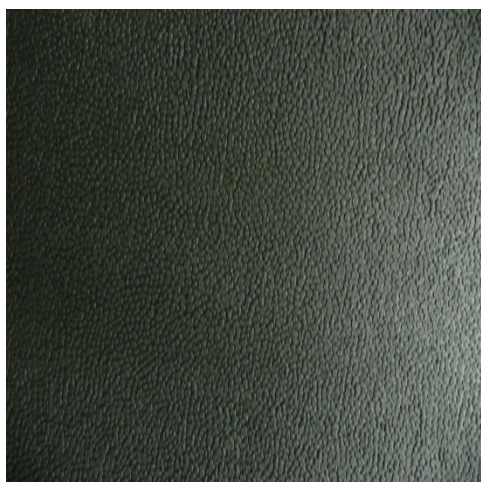

UTE Anti-Slip Rubber Mat

Anti-Fatigue Rubber Mat

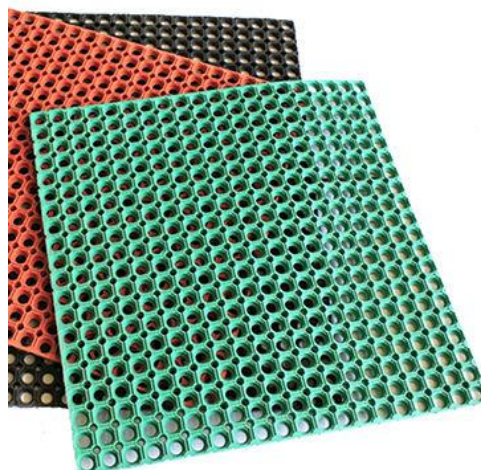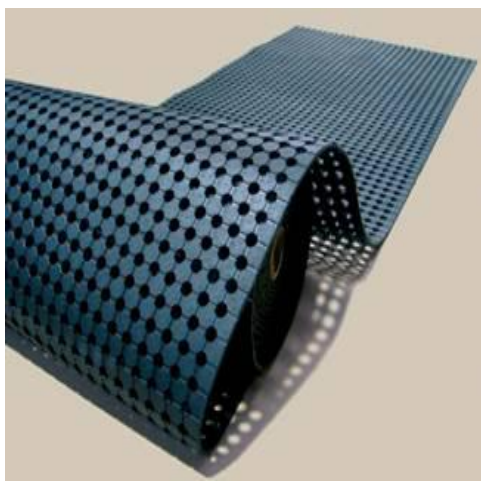

Anti-Fatigue Rubber Mat

Bubble Rubber Mat





格林达宣城格林达橡塑密封科技有限公司

XUANCHENG GRAND RUBBER & SEALING TECHNOLOGY CO.,LTD

防滑橡胶垫系列

ANTI-SLIP RUBBER MAT SERIES

- 特点: 韧性好、防滑、抗震
- 用途: 适用于天桥、车厢、体育场所、健身房、仓库等地面铺设
- Feature :Good elasticity,anti-slip and anti-shock
- Application : It can be used for overbridge,carriage,gymnasium,warehouse.
- Specification:

①-⑧Rubber Mat

厚度/Thickness	宽度/Width	长度/Length
3-6mm	500mm--1500mm	1-50m

●Specification:

UTE Rubber Mat

厚度/Thickness	宽度/Width	长度/Length
10mm	914mm&1830mm	5m-50m

Anti-Fatigue Rubber Mat

厚度/Thickness	宽度/Width	长度/Length
15mm	900mm	1500mm
22mm	1000mm	1480mm
12mm	805mm	1010mm
12mm	914mm	1524mm
20mm	920mm	920mm

Bubble Rubber Mat

厚度/Thickness	宽度/Width	长度/Length
18mm	1000mm	1500mm

Properties Quality	硬度 Hardness ShoreA	比重 Density g/cm3	拉伸强度 Tensile strength MPA	伸长率 Elongation %	温度范围 Temperature range (℃)
①-⑧ RUBBER MAT	65±5	1.5	3.5	250	-30~+120
UTE RUBBER MAT	65±5	1.4	5.0	250	-30~+120
Anti-Fatigue Mat	65±5	1.4	5.0	250	-30~+120
Bubble Rubber Mat	65±5	1.4	5.0	250	-30~+120

备注/Note:

- ①该类型产品可提供各种颜色/All the colors available.
- ②该类型产品根据性能需要可以夹纱布、尼龙布等/Cloth insertion、nylon insertion available.
- ③该类型产品背面可以制成布纹效果/Back Cloth impression finish available.
- ④该产品性能和尺寸可根据客户需求定制/Specification and dimension on the customer's request.




格林达 宣城格林达橡塑密封科技有限公司

XUANCHENG GRAND RUBBER & SEALING TECHNOLOGY CO.,LTD

橡胶制品(模压&挤出)系列

RUBBER PRODUCTS(MOLDED & EXTRUSION)SERIES

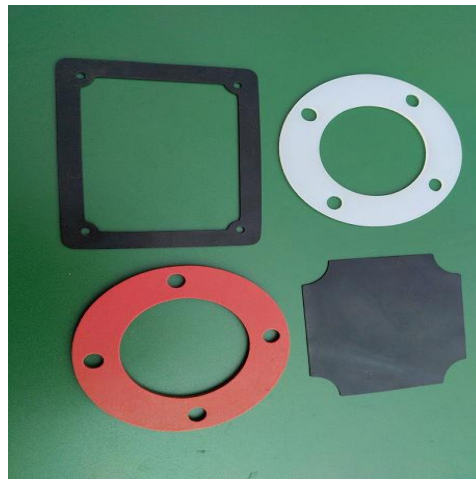



格林达 宣城格林达橡塑密封科技有限公司


XUANCHENG GRAND RUBBER & SEALING TECHNOLOGY CO.,LTD








格林达 宣城格林达橡塑密封科技有限公司

XUANCHENG GRAND RUBBER & SEALING TECHNOLOGY CO.,LTD

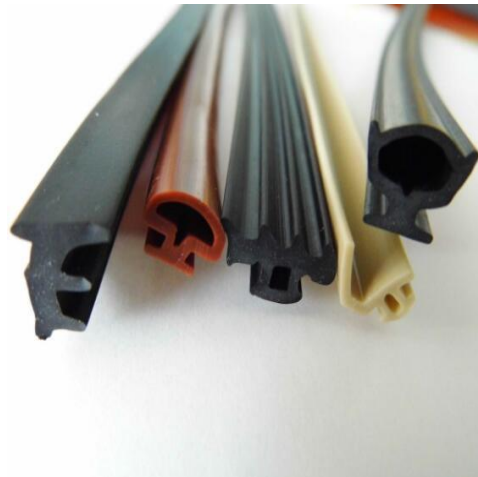

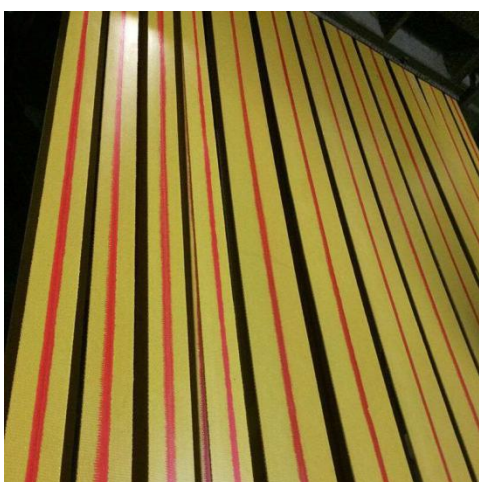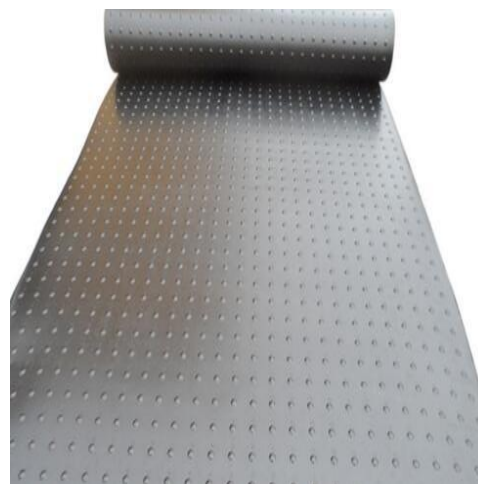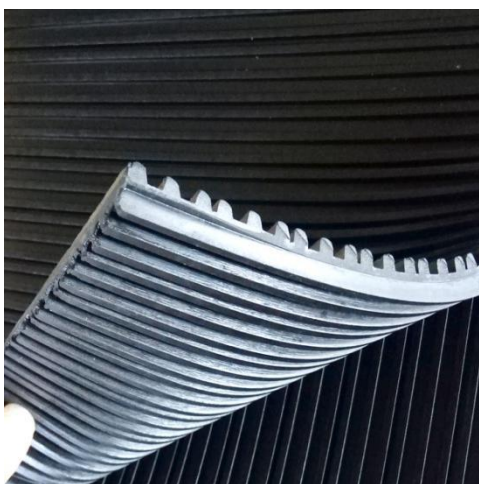

密封制品系列

SEALING PRODUCTS SERIES

